


Prestressed Concrete Turnout Sleeper with KS Fastening System for KS-Type

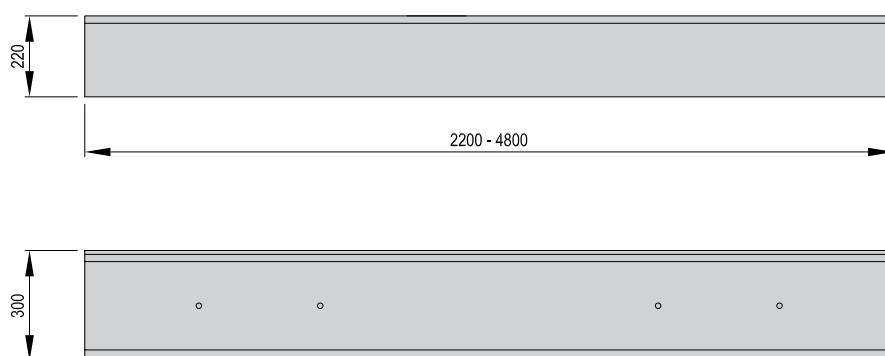

All dimensions in mm

Field of application:	Turnout
Permissible wheel set load:	250 kN
Track gauge:	1435 mm or according to customer specification
Sleeper length:	2.20 m bis 4.80 m
Rail fastening system:	KS-type
Can also be delivered with Fastclip rail fastening system	
Rail:	60 E 1 rail foot width 150 mm 49 E 1, 54 E 3 rail foot width 125 mm
Weight:	Without rail fastening system, approx. 160 kg / running metre
Can also be delivered as long sleeper and/or with conductor rail supports.	
Produced according to Deutsche Bahn standard DBS 918 143	